


If two pickups sound thin and nasal when used together, chances are, they're out of phase with each other. If you're combining your Seymour Duncan pickup(s) with Fender® pickup(s) in the same guitar, you'll need to reverse the black and green wires on the Seymour Duncan. In other words, solder the black wire to ground and the green wire to the selector switch.

Series/parallel (with push/pull)
Series/split/parallel (with on/on/on mini-toggle)

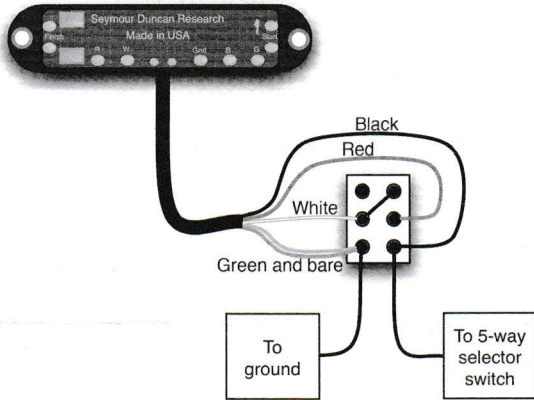

Solder = location for ground (earth) connections.

5-Way switch settings:

- Bridge full humbucker
- Bridge & middle (both split---hum-canceling)
- Middle full humbucker
- Middle & neck (both split---hum-canceling)
- Neck full humbucker

